

Bronco 99MD SS

Electric submersible slurry pumps



50 Hz

referential image



Electric submersible slurry pump, available in various cast iron and stainless-steel alloys. For operation in mines and industries that handle abrasive solids and slurries.

50 Hz	MD
Power, HP (kW)	80(60)
Voltage	380-500
Nominal Current, A	151-115
Weight, lb (kg)	3084(1402)
Max. height, inch (mm)	71(1805)
Max. diameter, inch (mm)	39(990)
Discharge, inch (mm)	8(200)
Strainer opening Ø, inch (mm)	1.77(45)

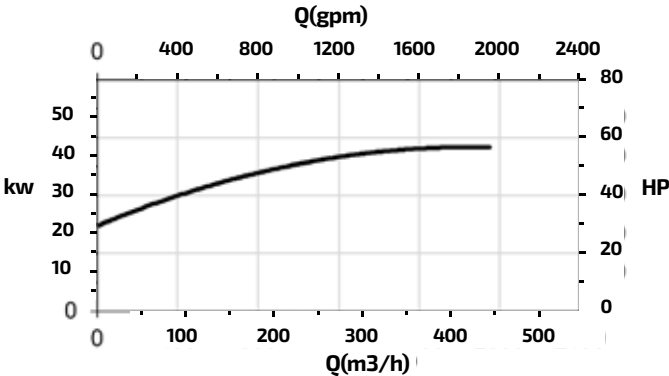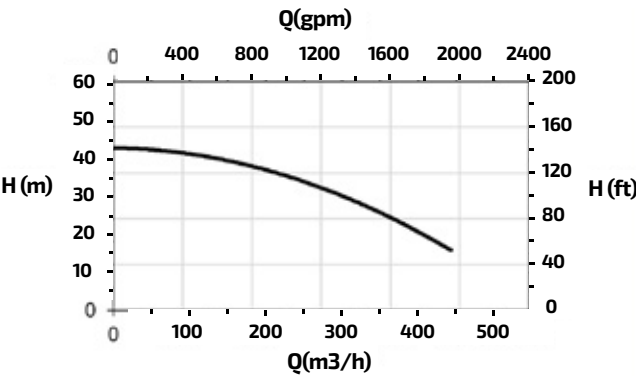

Models:

MD: Medium Duty

Classification

Submersible slurry pump

Electric motor

Three-phase squirrel cage motor
Speed: 1450 RPM
Insulation class: H
Start: Star-Delta, Soft Starter

Motor protection

Thermo-contacts in the winding
Protection: IP 68

Cable

2 cables 4G35 + 2x1.5mm², 20m (66 ft) (*)
This pump must be connected to an external electrical cabinet with adequate protection

Mechanical seals

Double mechanical seal in oil chamber.
Rotary seal material: silicon carbide.
Stationary seal material: silicon carbide.
Elastomers: Viton.

Discharge connection

8". (*)

Limitations

Maximum submersion: 20 m (66 ft)
Maximum liquid temperature: 40 °C (104 °F)
Liquid pH range: 2 – 11.

Available materials

Cover: Stainless Steel.
Strainer: Stainless Steel.
Impeller: Stainless Steel duplex.
Agitator: Stainless Steel duplex.
Wear plate: Stainless Steel duplex.
Cover suction: Stainless Steel.
Casing/volute: Stainless Steel.
Shaft: Stainless Steel.
Screws/Nuts: Stainless Steel.

*Specifications may be modified without prior notice.